




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04M 11/06, H04L 25/02		A1	(11) International Publication Number: WO 99/48272
			(43) International Publication Date: 23 September 1999 (23.09.99)
(21) International Application Number: PCT/US99/05170 (22) International Filing Date: 10 March 1999 (10.03.99) (30) Priority Data: 09/039,744 16 March 1998 (16.03.98) US (71) Applicant: MIDCOM, INC. [US/US]; 121 Airport Drive, Watertown, SD 57201-6330 (US). (72) Inventors: LEVASSEUR, David, J.; 15 Sunrise Drive, Watertown, SD 57201 (US). WETZEL, Richard, M.; 326 North Maple, Watertown, SD 57201 (US). RIGDON, Donald, B.; 1011 - 17th Street N.E., Watertown, SD 57201 (US). (74) Agent: BRUESS, Steven, C.; Merchant, Gould, Smith, Edell, Welter & Schmidt, P.A., 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402-4131 (US).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: DIGITAL ISOLATION APPARATUS AND METHOD

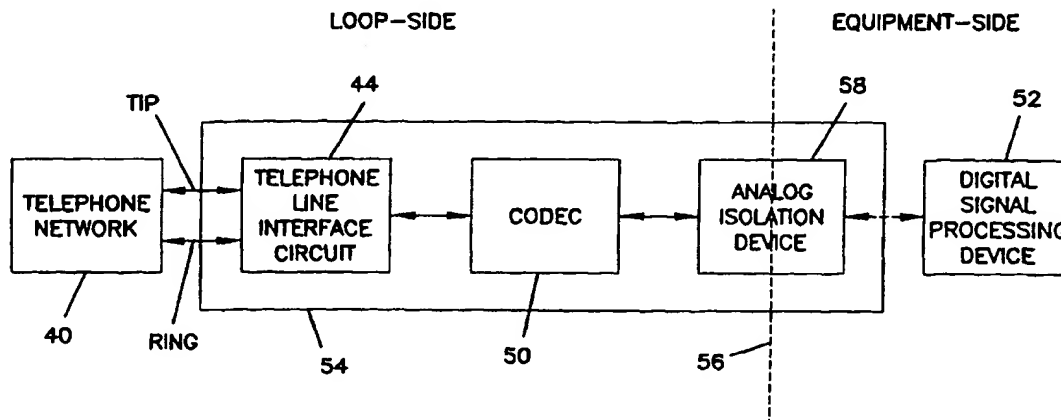

(57) Abstract

A digital isolation apparatus for coupling between a telecommunication network and a digital signal processing device. A CODEC is arranged to couple to the telecommunication network, convert a first set of analog signals from the telecommunication network to a first set of digital signals, and convert a second set of digital signals to a second set of analog signals to the telecommunication network. A digital isolation device, arranged to connect between the CODEC and the digital signal processing device, pass the first set of digital signals from the CODEC to the digital signal processing device, and pass the second set of digital signals from the digital signal processing device to the CODEC. A power supply assembly supplies power to the CODEC via the digital isolation device.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

DIGITAL ISOLATION APPARATUS AND METHOD

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

The present invention relates to the field of telephonic devices, and more particularly to a digital isolation apparatus and method and a power supply and method for the telephonic devices.

10

2. Description of Related Art

Generally, before a device can be legally connected to a public telephone network **40** as shown in Figure 1, it must be granted approval by one or more safety agencies. Approval status (pass or fail) is determined by testing the device according to the agency's safety requirements. The testing typically includes the verification that an effective electrical isolation barrier **48** as shown in Figure 1 exists between a user-connected device (equipment-side) and the telephone network (loop-side). Verification that the isolation barrier meets the safety requirements set forth by the relevant agency is a key to proving that a product can safely be connected to the public telephone network **40**. It also means that an electronic device, e.g. a Digital Signal Processing (DSP) device **52**, will be sufficiently isolated from the telephone network **40** in the event lightning strikes the telephone line or an electric power line falls across or otherwise contacts the telephone line.

25

In addition, to maintain isolation, the telephone network-side (loop-side) electronic circuits (as shown in Figures 1, 2, and 5, left of isolation lines **46**, **56**, and **72**) are generally powered by the telephone network **40**. Typically, the electronic circuits on the loop-side that are powered by the telephone network **40** require additional complex power supply circuits. Alternatively, some of the electronic circuits may be powered by means of a conventional battery power supply. Accordingly, these conventional power supplies add significant cost and complexity to telephone network interface designs. Therefore, a need exists for a low cost, efficient technique of providing an isolated source of power from a safe-side, for instance, equipment-side to the loop-side.

35

Figure 1 illustrates a conventional arrangement where an isolation barrier **48** resides in a section of circuitry commonly referred to in the telephone industry as a

Data Access Arrangement (DAA) 42 (Figure 1). Originally, the function of the DAA was solely to protect the telephone network 40 from a malfunctioning user-connected device. The DAA was designed to be a stand alone, separate piece of equipment. Today, the term DAA can be more broadly applied to encompass the
5 circuitry in a piece of telephonic equipment that provides a similar isolation function for safety purposes as the original stand alone DAA 42.

Figure 1 illustrates the conventional isolation safety barrier 48 coupled directly to a telephone line interface circuit 44 on one end and coupled to a
10 Coder/Decoder (CODEC) 50 as shown in Figures 1-5 on the opposite end. The CODEC 50 usually contains both an analog-to-digital (A/D) converter and a digital-to-analog (D/A) converter.

The conventional isolation device 48 is an analog isolation device, such as an
15 analog transformer whose function is to isolate loop-side from the equipment-side. The analog transformer passes the entire frequency band of analog signals from the telephone network via the telephone line interface circuit 44 to the CODEC 50 which is connected to the DSP device 52. The interface between the telephone network 40 and the DSP device 52 can be arranged and configured to function as a
20 modem. In the example of a modem, the band of frequencies ranges from 10 Hz to 4,000 Hz.

Several disadvantages exist with a conventional analog transformer as an isolation device. First, the size of an analog transformer is generally too big.
25 Excursions along the analog transformer's electro-magnetic B-H loop causes distortions in the analog signal passed by the transformer. Smaller transformers have greater excursions along the B-H loop as compared with larger transformers. Therefore, larger analog transformers perform better than smaller ones. As more and more demand for a smaller size of the transformer, a point is reached where it
30 becomes physically too small to function properly due to the distortions. Additionally, further size reduction of a transformer reduces the internal creepage and clearance distances required for isolation. If the creepage and clearance distances become too small, the transformer will not function as an effective isolation barrier, and the user-connected device may become unsafe for use on the
35 public telephone network. Larger, higher performance, transformers are too large for applications such as a PCMCIA modem requiring a relatively small transformer. Currently, the PCMCIA modem is constrained to fit in a space equivalent to a stack

of three credit cards. In this application, the transformer's small size can result in analog signal distortion that severely hampers the modem's performance.

5 A proposed approach of reducing the size of the transformer is to move the isolation barrier 48 from the analog interface to the digital interface 56 as shown in Figure 2. However, this method requires a power source for the loop-side coding and decoding (CODEC) circuitry. In the existing proposal, the power source is provided by the telephone network 40 or by a separate battery supply.

10 One disadvantage associated with powering the loop-side circuitry from the telephone network 40 relates to sensing the state of the telephone line. It requires detecting a voltage between a telephone network connection's TIP and RING lines. TIP and RING are typically two lines that carry data, ringing signal, and dial tone from the telephone network's central office to a user connection. The TIP and RING
15 lines have two states, ON-HOOK and OFF-HOOK. The state of the telephone line, when not in use, is referred to as ON-HOOK. Whereas OFF-HOOK refers to the state of the telephone line when it is in use. Typically, the voltage between TIP and RING while the telephone line is ON-HOOK is approximately 48 VDC. Alternatively, while in the OFF-HOOK state, the voltage drops to a level between 6
20 and 12 VDC. Sensing the voltage across TIP and RING while the telephone line is ON-HOOK, for the purpose of obtaining power for the proposed approach, requires that the circuitry draw an extremely small amount of current. Otherwise, the telephone network central office switching circuits will sense the current flowing through the telephone line causing it to go OFF-HOOK. Generally, telephone
25 networks require the ON-HOOK current thresholds to be much lower than 3 milliamps and are typically set at 10 micro-amps. Accordingly, sensing the state of the telephone line for obtaining power for the loop-side CODEC in the above proposed approach cannot be readily accomplished.

30 Alternatively, power may be obtained from the telephone line while it is OFF-HOOK via the ringing signal. Generally, this technique is difficult to implement because the ringing signal has a much higher voltage than that of standard silicon circuits. In addition, the ringing signal is typically shared with other telephonic devices connected to the same line. Drawing too much current from the
35 ringing signal may cause the telephone network central office equipment to assume the device(s) went OFF-HOOK, thus failing a registration test.

It can be seen that there is a need for an improved apparatus and method of isolating signals between the telephone network and digital processing devices.

It can also be seen that there is a need for an improved apparatus and method
5 of supplying power to the loop-side circuitry.

SUMMARY OF THE INVENTION

To overcome the limitations in the prior art described above, and to overcome other limitations that will become apparent upon reading and
10 understanding the present specification, the present invention discloses an improved apparatus and method for providing digital isolation between the telephone network and telephone devices and an improved power supply.

The present invention solves the above-described problems by providing an
15 isolation barrier at a digital interface and by supplying an isolated power source via the isolation barrier.

One aspect of the present invention is to isolate digital signal processing devices from a telephone network. In one embodiment, a CODEC is connected
20 between a telephone interface circuit and a digital isolation device.

Accordingly, signal distortions caused by the analog transformer at the analog telephone interface side are eliminated in the present invention.

25 Further in one embodiment, a digital clock signal is used for supplying power to the CODEC via the digital isolation device. In one embodiment, the digital isolation device includes an isolation transformer barrier. In alternative embodiments, the digital isolation device can be any device capable of passing digital data signals and digital clock signals to and from the CODEC and a digital
30 signal processing device. Such digital isolation devices may include pulse transformers; ceramic devices such as transformers, capacitors, and piezoelectric transducers; optical couplers; or any other devices capable of passing digital data signals and digital clock signals (or referred to power signals).

35 Another aspect of the present invention is that the present invention can be used in many telephonic devices, such as modems, fax, ATM, PBX (Private Branch Exchange), etc.

A further aspect of the present invention is that the digital clock signal is obtained from a digital clock at the digital processing device. The digital clock generates signals, such as square wave signals, and supplies the signals to the loop-side electronic circuitry via the digital isolation barrier. In one embodiment, the digital clock signal can be generated by the same clock which provides synchronizing pulses for electrical devices. Further, in one embodiment, the digital clock signal transfers its power across the digital isolation barrier, such as a transformer. In an alternative embodiment, the digital clock signal may transfer its power across an isolation barrier such as optical, piezo-electric, capacitive, or other isolation barrier devices.

The present invention is also a method of supplying isolated power from the equipment-side to the loop-side via a digital isolation barrier. In one embodiment, a power conversion circuitry receives a digital clock signal from the equipment-side and provides electric power to the CODEC. Still in one embodiment, the signals from the power conversion circuitry also provide electric power to the telephone line interface circuitry.

Yet in one embodiment, the present invention provides isolation between a CODEC and the digital processing devices such as wireline telephonic devices including: digital telephones, modems, fax machines, answering machines, caller-ID equipment, Private Branch Exchange (PBX) equipment, call diverters, conferencing systems, speakerphones, etc. The invention provides isolation at the digital interface 56 shown in Figures 2 and 4 following the CODEC's 50 conversion of analog signals into digital signals. In one embodiment, the isolation technique utilized in the present invention is preferably magnetic, in the form of a pulse transformer; however, other suitable isolation techniques such as optical devices, capacitors, or piezo-electric devices, etc., may be used within the principles of the present invention.

Further in one embodiment of the present invention, the equipment-side digital processing circuitry 52 shown in Figures 1-5 may be modified to interface several common computer bus architectures such as: Peripheral Component Interconnect (PCI), Instrument Standard Architecture (ISA) bus, Extended Instrument Standard Architecture (EISA) bus, Microchannel, NuBus, VMX, Universal Serial Bus (USB), FireWire (see IEEE-1394), etc.

Still in one embodiment, a digital clock signal is transferred across an isolation channel of the isolation devices to the CODEC and simultaneously to a power conversion circuit that is able to convert the clock signal into an isolated power source. Thus, the present invention eliminates the need for the loop-side electronic circuitry to obtain power from: the telephone network or from a separate battery source, or from other separate sources.

Several advantages arise by providing power to the loop-side circuitry from the equipment-side clock signal, independent of the telephone network 40. One advantage is that the source for the loop-side electronic circuitry can be provided without drawing a current from a telephone line, which may change a state of the telephone line. Another advantage is that it can provide power for other circuits such as caller ID, etc. A further advantage is that the clock signal can be generated from a master clock that is usually utilized for synchronizing transmit/receive signals.

These and various other advantages and features of novelty which characterize the invention are pointed out with particularity in the claims annexed hereto and form a part hereof. However, for a better understanding of the invention, its advantages, and the objects obtained by its use, reference should be made to the drawings which form a further part hereof, and to accompanying descriptive matter, in which there are illustrated and described specific examples of an apparatus in accordance with the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

FIGURE 1 is a block diagram of a conventional Data Access Arrangement (DAA) with connections between a telephone network and digital signal processing devices.

FIGURE 2 is a block diagram of a digital isolation device in accordance with the present invention.

FIGURE 3 is a block diagram of a conventional modem-type device with connections between a telephone network and a computer.

FIGURE 4 is a block diagram of the digital isolation device of **FIGURE 2** used in a modem-type device.

5 **FIGURE 5** is a block diagram of the digital isolation device used in a modem-type device that supplies loop-side electronics with an isolated power supply, and of a power conversion circuit received by a digital clock signal via the digital isolation device, in accordance with the present invention.

10 **FIGURE 6** is a block diagram of the digital clock signal being supplied to the power conversion circuit to generate an isolated power supply for electronic devices.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

15 In the following description of the exemplary embodiment, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration the specific embodiment in which the invention may be practiced. It is to be understood that other embodiments may be utilized as structural changes may be made without departing from the scope of the present invention.

20 Figure 1 illustrates a conventional Data Access Arrangement (DAA) **42** between a telephone network **40** and a Digital-to-Analog/Analog-to-Digital converter, commonly referred to as a CODEC **50**, which is connected to the digital signal processing device **52**. The DAA **42** includes an analog isolation device **48** which provides an analog isolation between a telephone line interface circuit **44**
25 connected to the telephone network **40** and the CODEC **50**. The CODEC **50** converts the analog signals from the telephone network **40** to digital signals. The isolated digital signals are then sent to a digital signal processing device **52**. The isolation by the analog isolation device **48** is generally illustrated by a phantom line **46** which divides circuits into a loop-side and an equipment-side.

30 Figure 2 illustrates a digital isolation device in accordance with the principles of the present invention. A digital isolation device **58** provides an isolation between the telephone line interface circuit **44** and the CODEC **50** generally illustrated by a phantom line **56**. Data is exchanged between the loop-side and the equipment-side. A DAA **54** includes a digital isolation device **58** which provides an isolation barrier
35 between the CODEC **50** and the digital processing device **52**. The DAA **54** is

connected to the telephone network 40 with no isolation between the CODEC 50 and the telephone network 40. Accordingly, isolation is provided at the digital side of a telephonic device.

Figure 3 illustrates a conventional modem-type device 60 with an analog
5 isolation between the loop-side and the equipment-side. The modem-type device 60 may include the analog DAA 42 in communication with the DSP 52. The modem-type device 60 can be connected between the telephone network 40 and a computer 61. The modem-type device 60 may include an interface circuit 62.

Figure 4 illustrates a modem-type device 64 in accordance with the
10 principles of the present invention with a digital isolation between the loop-side and equipment-side. The modem-type device 64 may include the digital DAA 54 in communication with the DSP 52. The modem-type device 64 can be connected between the telephone network 40 and the computer 61. The modem-type device 64 may include the interface circuit 62.

Figure 5 illustrates an alternative embodiment of a DAA 66 generally in
15 accordance with the principles of the present invention with a digital isolation between the equipment-side and the loop-side, generally illustrated by a phantom line 72. A digital isolation block 76 of the digital isolation device 58 transmits a digital clock signal from the equipment-side to the loop-side. On the loop-side, the
20 clock signal functions both to synchronize the CODEC 50 and to provide an input to a power conversion circuit 74. The clock signal frequency can be any frequency. In a preferred embodiment, the frequency of the clock signal may range between 400 kHz and 2 MHz. The power conversion circuit 74 converts the clock signal (e.g. square wave A.C.) to a direct current (D.C.) power 68. The D.C. power 68 can
25 range from 2 to 12 Volts, and in one embodiment, from 3 to 6 Volts, and further in the preferred embodiment, from 3.3 to 5 Volts. D.C. power 68 is supplied to the CODEC 50 and the telephone line interface 44 or any other suitable circuits 92. A digital isolation block 78 of the digital isolation device 58 transmits data from/to the CODEC 50, on the loop-side, and to/from the digital signal processing device 52, on
30 the equipment-side. In a multiple channel application, data signals are de/multiplexed by a mux/demux 84 and a mux/demux 86. The clock signals are de/multiplexed by a mux/demux 88 and a mux/demux 90. The CODEC 50 and DSP 52 digital connections may include many, e.g. sixteen separate wire connections. Mux/Demuxes can be used to minimize the number of channels required to be
35 isolated. In one embodiment, the number of physical wire connections can be

reduced to two wire connections per channel, with a total of four channels. In an alternative embodiment, a single pair of wire connections with a single digital isolation device can also be used to transmit the data signals and the clock signal.

Still in Figure 5, the digital signal processing device 52 may include a clock 82 for providing a clock signal to be used as a power. The clock 82 can be a master clock of the digital signal processing device 52 which usually provides a synchronizing function for transmit/receive data in the modem-type device 66.

Figure 6 illustrates the clock 82 providing a digital clock signal to the power conversion circuit 74. The power conversion circuit 74 converts the A.C. power to D.C. power and sends the D.C. power to an electrical circuit 80.

In operation, the digital isolation device 58 isolates the loop-side from equipment-side at the digital interfaces generally illustrated by phantom lines 56 and 72. In the preferred embodiment, the digital isolation device 58 can be pulse transformers. In alternative embodiments, the digital isolation device 58 can be optical couplers, capacitors, piezo-electric, or other suitable devices which are capable of transmitting/receiving data and power signals.

In the present invention as illustrated in one embodiment shown in Figure 5, ring detection can be performed using a conventional opto-isolator circuit contained within the telephone line interface 44. Power is not drawn from the telephone network 40 by the DAA 66. Also, there is no external battery required to supply power to the loop-side circuitry. All loop-side electronic devices, CODEC 50, telephone line interface circuit 44, and other electrical circuits 92, etc., are powered by the energy transferred across the digital isolation block 76 of the digital isolation device 58.

Further in Figure 5, the CODEC 50 converts analog signals from the telephone network 40 to digital signals and sends them to the mux/demux 84 on the loop-side. The digital signals are then transmitted across the digital isolation block 78 of the digital isolation device 58 to the mux/demux 86 on the equipment-side. The mux/demux 86 sends the digital signals to the DSP device 52.

Still in Figure 5, the DSP 52 transmits the clock signal through the mux/demux 88 and subsequently through the digital isolation block 76 to the power conversion circuit 74 for supplying power in one branch and to the mux/demux 90

and the CODEC 50 for synchronization in the other branch. The digital clock signal synchronizes data communications in the modem-type device 66. The power conversion circuit 74 converts the A.C. power of the clock signals to the D.C. power 68 to power the loop-side electrical circuits, such as the CODEC 50, etc.

- 5 Accordingly, an isolated power source is provided to the CODEC 50 and other circuits.

The power conversion circuit 74 may include high-frequency, schottky diodes, arranged in a half-wave bridge rectifier.

- 10 The above specification, examples, and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

WE CLAIM:

1. A digital isolation apparatus for coupling between a telecommunication network and a digital signal processing device, comprising:
 - 5 a CODEC, arranged to couple to the telecommunication network, convert a first set of analog signals from the telecommunication network to a first set of digital signals, and convert a second set of digital signals to a second set of analog signals to the telecommunication network;
 - a digital isolation device, arranged to connect between the CODEC and the digital signal processing device, the digital isolation device passing the first set of digital signals from the CODEC to the digital signal processing device and passing the second set of digital signals from the digital signal processing device to the CODEC; and
 - 10 a power supply assembly supplying power to the CODEC via the digital isolation device, the power supply assembly including a clock.
2. The digital isolation apparatus according to claim 1, wherein the clock sends signals to synchronize digital signals.
- 20 3. The digital isolation apparatus according to claim 1, wherein only digital signals cross the digital isolation device.
4. The digital isolation apparatus according to claim 1, wherein the digital isolation device comprises at least one transformer.
- 25 5. The digital isolation apparatus according to claim 1, wherein the digital isolation device comprises at least one pulse transformer.
6. The digital isolation apparatus according to claim 1, wherein the digital isolation device comprises at least one ceramic transformer.
- 30 7. The digital isolation apparatus according to claim 1, wherein the digital isolation device comprises at least one optical isolation device.
- 35 8. The digital isolation apparatus according to claim 1, wherein the digital isolation device comprises at least one capacitive isolation device.

9. The digital isolation apparatus according to claim 1, wherein the digital signal processing device includes an electrical interface to a telephonic device.

5 10. The digital isolation apparatus according to claim 1, wherein the digital signal processing device includes an electrical interface to a digital communications bus.

10 11. A modem for coupling between a telecommunication network and a digital processing device, comprising:

a CODEC, arranged to couple to the telecommunication network, convert a first set of analog signals from the telecommunication network to a first set of digital signals, and convert a second set of digital signals to a second set of analog signals to the telecommunication network;

15 a digital isolation device, arranged to connect between the CODEC and a digital signal processing device, the digital isolation device passing the first set of digital signals from the CODEC to the digital signal processing device and passing the second set of digital signals from the digital signal processing device to the CODEC, the digital signal processing device being in communication with the
20 digital processing device; and

a power supply assembly supplying power to the CODEC via the digital isolation device, the power supply assembly including a clock.

25 12. A digital clock for generating timing signals and supply power, comprising:

an oscillator source providing a synchronized sequence of pulses; and
a power conversion circuit for supplying power via a digital isolation device.

30 13. A method of supplying an electrical circuit in a Data Access Arrangement (DAA) with an isolated power source, comprising the steps of:

- (a) generating a digital clock signal;
- b) transmitting the digital clock signal across a digital isolation device; and
- (c) utilizing the digital clock signal so as to provide the isolated
35 power source for the electrical circuit.

FIG. 1
(PRIOR ART)

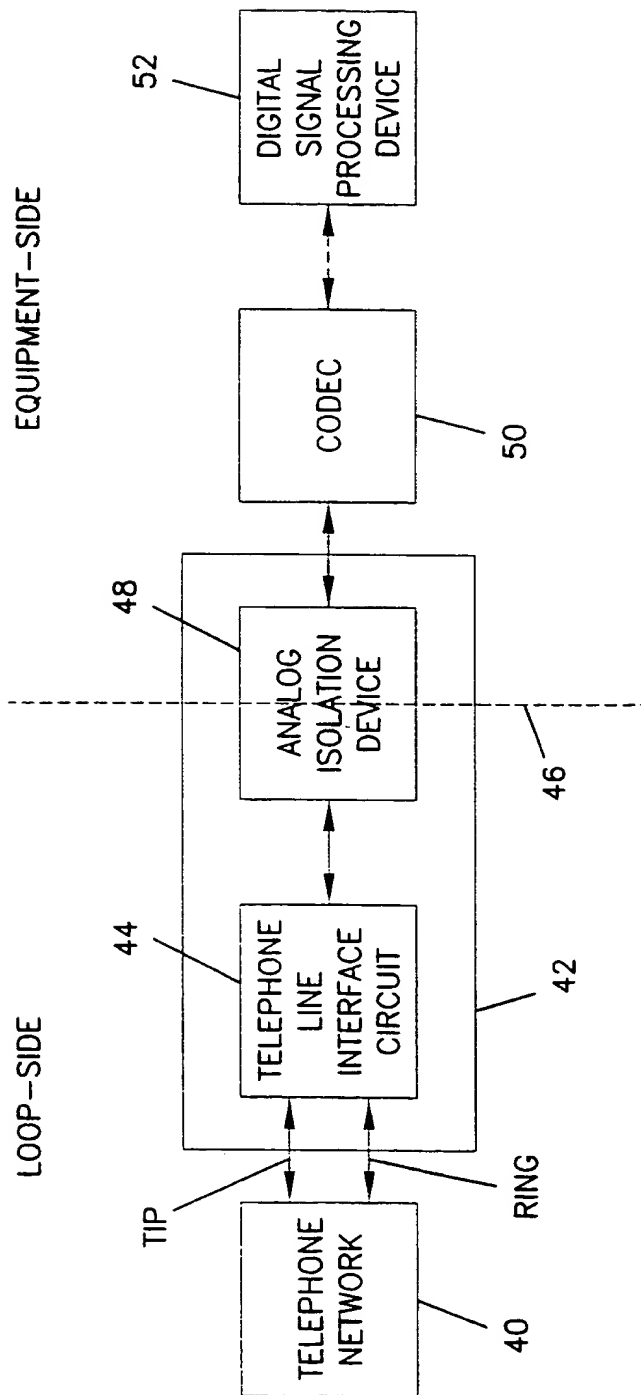


FIG. 2

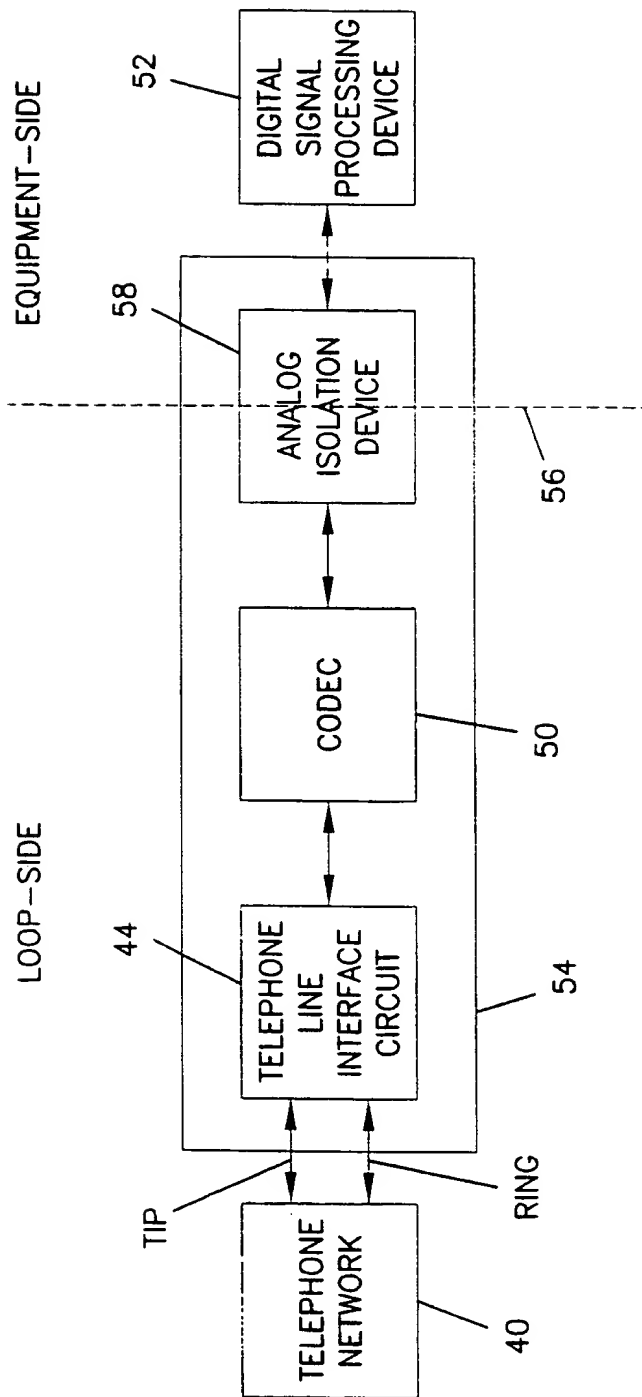


FIG. 3
(PRIOR ART)

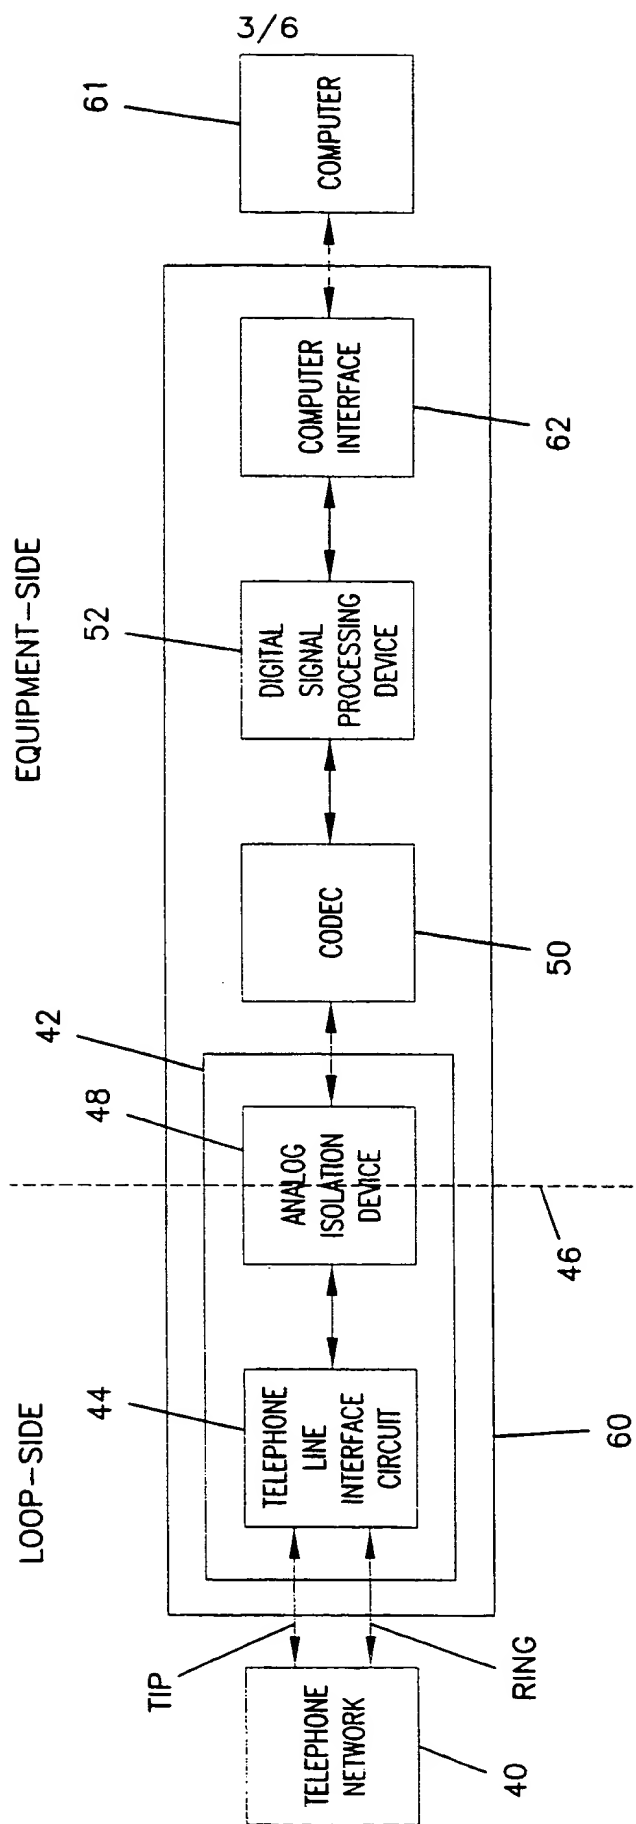


FIG. 4

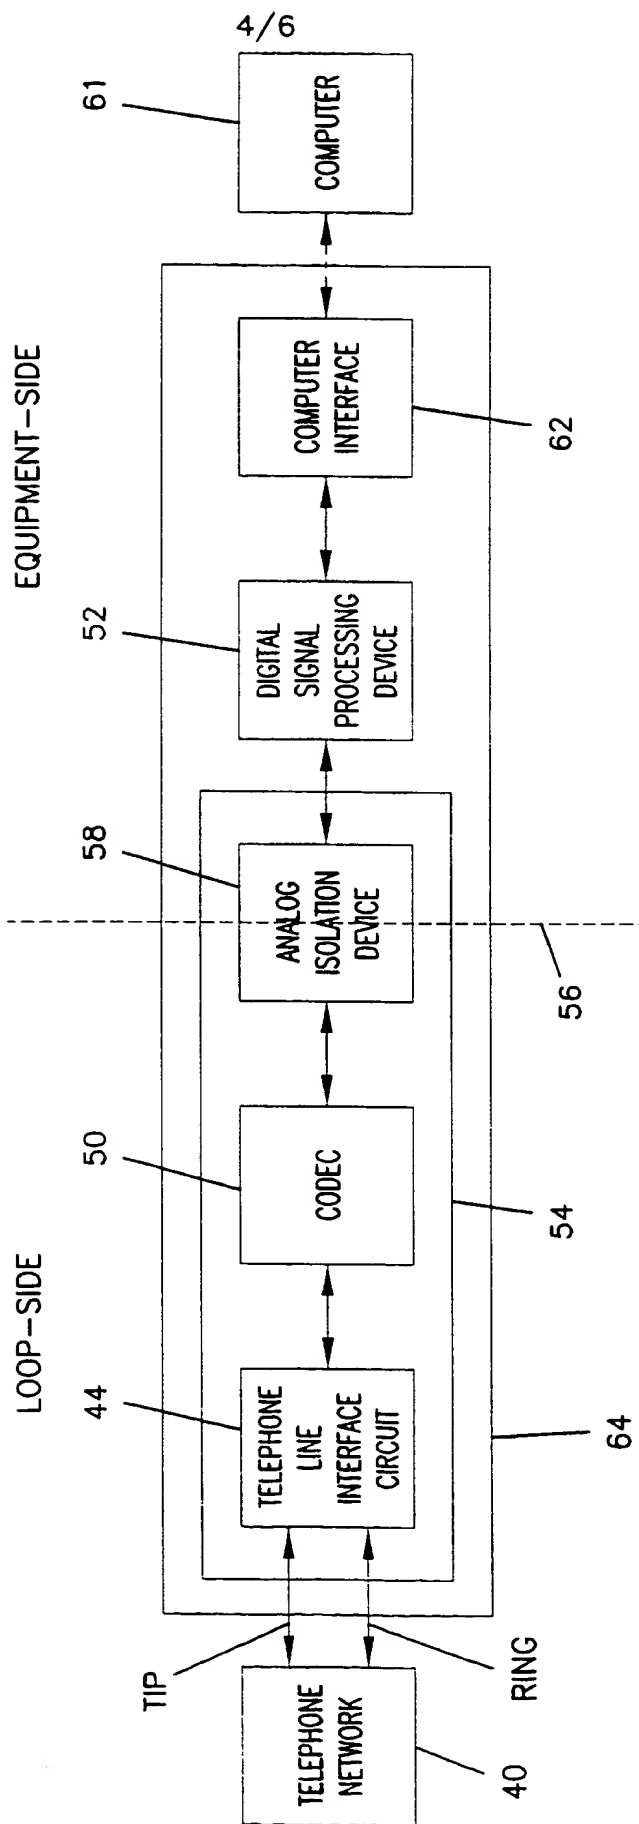
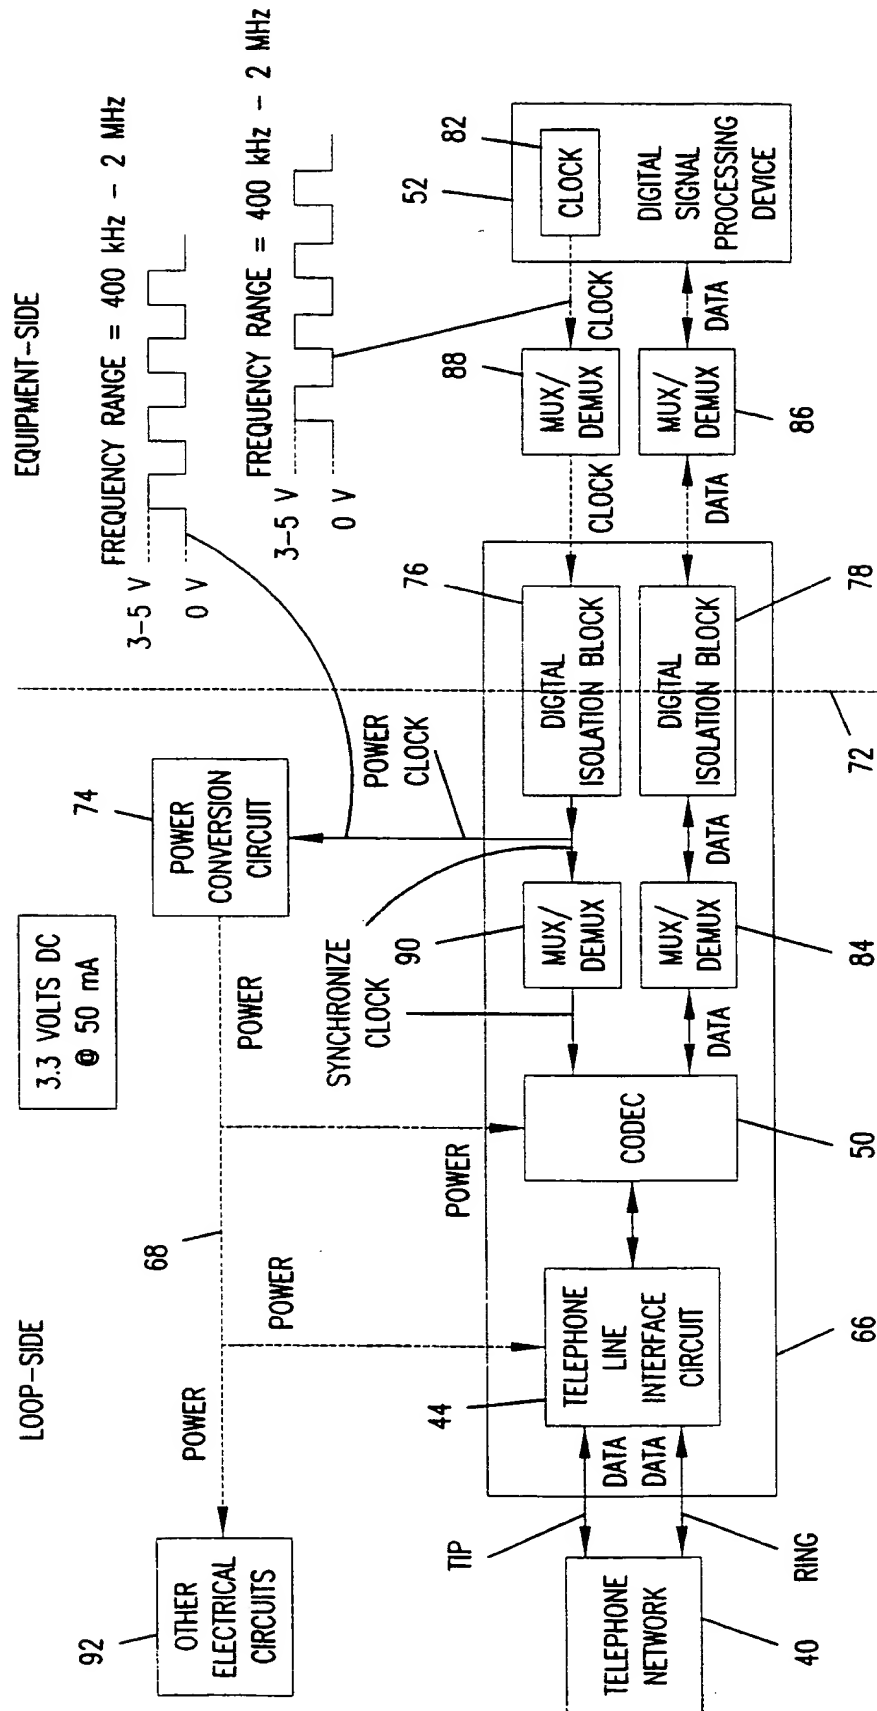


FIG. 5



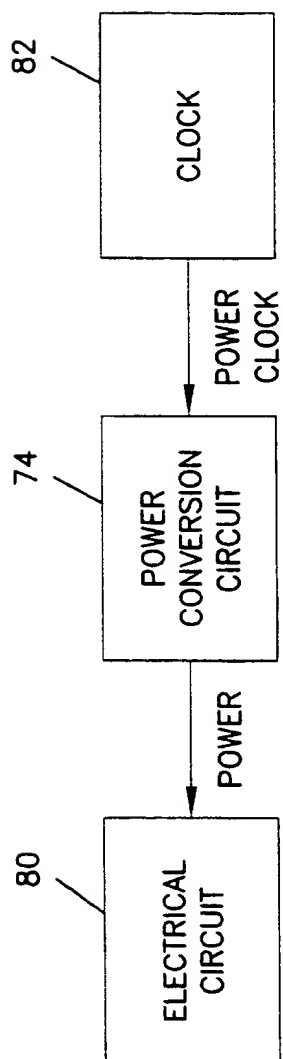


FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/05170

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04M11/06 H04L25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 576 882 A (ROCKWELL INTERNATIONAL CORP) 5 January 1994 (1994-01-05) abstract column 3, line 57 - column 4, line 17	1-7, 9-11, 13
A	---	8, 12
Y	WO 98 09411 A (MOTOROLA INC) 5 March 1998 (1998-03-05) abstract page 5, line 5 - line 18	1-7, 9-11, 13
X	---	12
A	US 5 654 984 A (HERSHBARGER RUSSELL A ET AL) 5 August 1997 (1997-08-05) abstract; figure 2 ---	1-3, 8-11
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

26 August 1999

Date of mailing of the international search report

06/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mikkelsen, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/05170

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 573 721 A (IBM) 15 December 1993 (1993-12-15) abstract column 6, line 34 - line 38 column 8, line 12 - line 54 ----	1-3, 7, 9-11, 13
X	GB 2 102 230 A (PLESSEY CO LTD) 26 January 1983 (1983-01-26) the whole document -----	12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/05170

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0576882 A	05-01-1994	US 5369666 A	29-11-1994
		DE 69309788 D	22-05-1997
		DE 69309788 T	20-11-1997
		JP 6098038 A	08-04-1994
WO 9809411 A	05-03-1998	AU 696985 B	24-09-1998
		AU 4239897 A	19-03-1998
		CN 1200213 A	25-11-1998
		DE 19780903 T	08-10-1998
		GB 2322724 A	02-09-1998
US 5654984 A	05-08-1997	JP 7307708 A	21-11-1995
EP 0573721 A	15-12-1993	JP 6062140 A	04-03-1994
GB 2102230 A	26-01-1983	DE 3226535 A	03-02-1983
		FR 2509930 A	21-01-1983
		NL 8202850 A	16-02-1983

THIS PAGE BLANK (USPTO)